



Rev.	Description	Date
A0	New release	2016.05.17

1.PHYSICAL CHARACTERISTICS(mm)

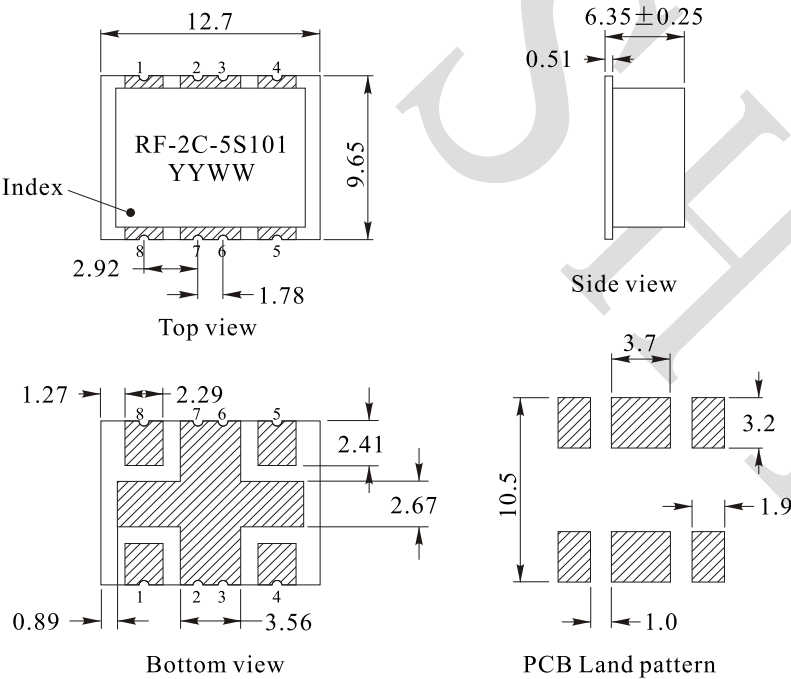

2.ELECTRONICAL SCHEMATIC

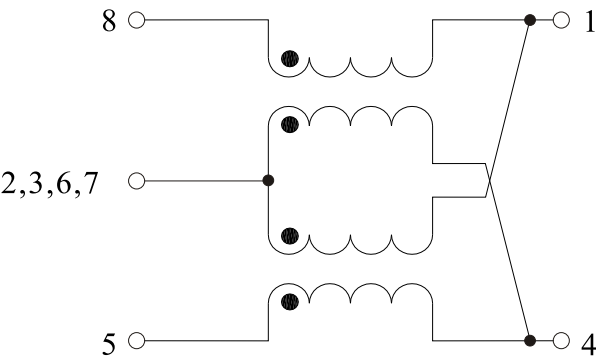

3.ELECTRONICAL SPECIFICATIONS

Frequency: 10-540MHz
Coupling: 19.8±0.5dB
Mainline loss: 0.6dB Max(0.2dB Typ.)
Directivity: 16dB Min(28dB Typ.)
VSWR: 1.1:1
Input power: 25W Max
Operating temperature: -40℃ to +85℃
Storage temperature: -55℃ to +100℃

- Note:
- 1.Solderability:leads shall meet MIL-STD-202, Method 208D for solderability.
 - 2.Flammability: UL94V-0
 - 3.ASTM oxygen index: >28%

NAME:	Bi-Directional coupler		
CUSTOMER P/N:		DATE:	2016-05-17
SHINHOM P/N:	RF-2C-5S101	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong to SHINHOM & is not allowed to be duplicated without authorization